


## BR-40 1+1

### Type 2 Surge Arrester

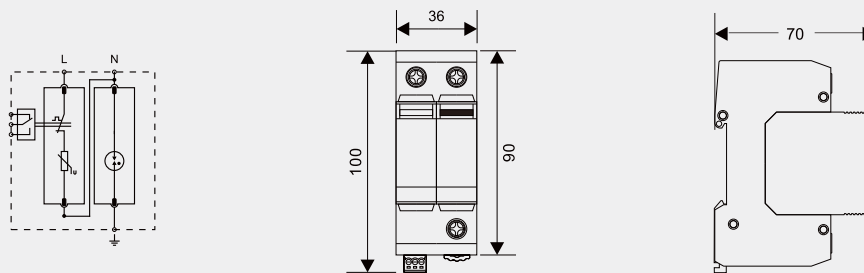

BR-40 1+1 surge arrester is suitable for TT and TN-S system.

	BR-40 150 1+1	BR-40 275 1+1	BR-40 320 1+1	BR-40 385 1+1	BR-40 440 1+1
SPD classification according to EN61643-11	Type 2	Type 2	Type 2	Type 2	Type 2
SPD classification according to IEC61643-11	Class II	Class II	Class II	Class II	Class II
Max. continuous operating a.c. voltage [L-N] U <sub>c</sub>	150V	275V	320V	385V	440V
Max. continuous operating a.c. voltage [N-PE] U <sub>c</sub>	255V	255V	255V	255V	255V
Nominal discharge current (8/20μs) I <sub>n</sub>	20kA	20kA	20kA	20kA	20kA
Max. discharge current (8/20μs) I <sub>max</sub>	40kA	40kA	40kA	40kA	40kA
Voltage protection level [L-N] U <sub>p</sub>	≤0.8kV	≤1.3kV	≤1.5kV	≤1.8kV	≤2.0kV
Voltage protection level 5kA [L-N] U <sub>p</sub>	≤0.6kV	≤1kV	≤1.2kV	≤1.4kV	≤1.6kV
Voltage protection level [N-PE] U <sub>p</sub>	≤1.5kV	≤1.5kV	≤1.5kV	≤1.5kV	≤1.5kV
Short-circuit withstand capacity I <sub>scCR</sub>	25kA	25kA	25kA	25kA	25kA
Temporary overvoltage TOV-withstand [L-N] U <sub>T</sub>	175V/5sec.	335V/5sec.	335V/5sec.	415V/5sec.	580V/5sec.
Temporary overvoltage TOV-safe failure [L-N] U <sub>T</sub>	230V/120min.	440V/120min.	440V/120min.	440V/120min.	765V/120min.
Temporary overvoltage TOV-withstand [N-PE] U <sub>T</sub>	1200V/200ms	1200V/200ms	1200V/200ms	1200V/200ms	1200V/200ms
Follow current extinguishing capability a.c. [N-PE] I <sub>fi</sub>	100Arms	100Arms	100Arms	100Arms	100Arms
Max. backup fuse	125A gG	125A gG	125A gG	125A gG	125A gG
Response time [L-N] t <sub>A</sub>	≤25ns	≤25ns	≤25ns	≤25ns	≤25ns
Response time [N-PE] t <sub>A</sub>	≤100ns	≤100ns	≤100ns	≤100ns	≤100ns
Operating temperature range T <sub>u</sub>	-40°C-80°C	-40°C-80°C	-40°C-80°C	-40°C-80°C	-40°C-80°C
Operating state/fault indication	green/red	green/red	green/red	green/red	green/red
Cross-section area (Min.)	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>
Cross-section area (Max.)	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>
For mounting on	35mm Din rail				
Enclosure material	Thermoplastic UL94-V0				
Degree of protection	IP20	IP20	IP20	IP20	IP20
Order Code	B18251	B18253	B18255	B18257	B18370
Order Code (With remote signaling)	B18252	B18254	B18256	B18258	B18371