





## BR-40 2P

### Type 2 Surge Arrester

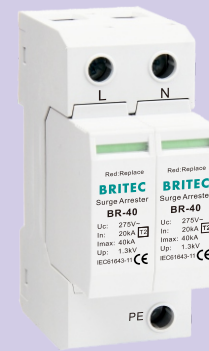

BR-40 2 pole surge arrester is suitable for TN-S system.

	BR-40 150 2P	BR-40 275 2P	BR-40 320 2P	BR-40 385 2P	BR-40 440 2P
SPD classification according to EN61643-11	Type 2	Type 2	Type 2	Type 2	Type 2
SPD classification according to IEC61643-11	Class II	Class II	Class II	Class II	Class II
Max. continuous operating a.c. voltage $U_c$	150V	275V	320V	385V	440V
Nominal discharge current (8/20 $\mu$ s) $I_n$	20kA	20kA	20kA	20kA	20kA
Max. discharge current (8/20 $\mu$ s) $I_{max}$	40kA	40kA	40kA	40kA	40kA
Voltage protection level $U_p$	$\leq 0.8kV$	$\leq 1.3kV$	$\leq 1.5kV$	$\leq 1.8kV$	$\leq 2.0kV$
Voltage protection level 5kA $U_p$	$\leq 0.6kV$	$\leq 1kV$	$\leq 1.2kV$	$\leq 1.4kV$	$\leq 1.6kV$
Max. backup fuse	125A gG	125A gG	125A gG	125A gG	125A gG
Short-circuit withstand capacity $I_{SCCR}$	25kA	25kA	25kA	25kA	25kA
Temporary overvoltage TOV-withstand $U_T$	175V/5sec.	335V/5sec.	350V/5sec.	550V/5sec.	580V/5sec.
Temporary overvoltage TOV-safe failure $U_T$	250V/120min.	440V/120min.	550V/120min.	660V/120min.	770V/120min.
Leakage current $I_{PE}$	$< 0.1mA$	$< 0.1mA$	$< 0.1mA$	$< 0.1mA$	$< 0.1mA$
Response time $t_A$	$\leq 25ns$	$\leq 25ns$	$\leq 25ns$	$\leq 25ns$	$\leq 25ns$
Operating temperature range $T_u$	$-40^{\circ}C - 80^{\circ}C$	$-40^{\circ}C - 80^{\circ}C$	$-40^{\circ}C - 80^{\circ}C$	$-40^{\circ}C - 80^{\circ}C$	$-40^{\circ}C - 80^{\circ}C$
Operating state/fault indication	green/red	green/red	green/red	green/red	green/red
Cross-section area (Min.)	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>	4 mm <sup>2</sup>
Cross-section area (Max.)	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>	35mm <sup>2</sup>
For mounting on	35mm Din rail				
Enclosure material	Thermoplastic UL94-V0				
Degree of protection	IP20	IP20	IP20	IP20	IP20
Order Code	B18201	B18203	B18205	B18207	B18209
Order Code (With remote signaling)	B18202	B18204	B18206	B18208	B18210