





BR-12.5M 2P

T1+T2 Surge Arrester

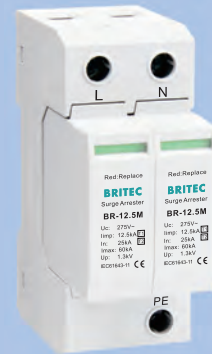

■ BR-12.5M 2P surge arrester is suitable for single phase TN system.

		BR-12.5M 150 2P	BR-12.5M 275 2P	BR-12.5M 320 2P
SPD classification according to EN61643-11		Type 1 + Type 2	Type 1 + Type 2	Type 1 + Type 2
SPD classification according to IEC61643-11		Class I + Class II	Class I + Class II	Class I + Class II
Max. continuous operating a.c. voltage	U_c	150V	275V	320V
Lightning impulse current (10/350μs)	I_{imp}	12.5kA	12.5kA	12.5kA
Total discharge current (10/350μs)	I_{total}	25kA	25kA	25kA
Nominal discharge current (8/20μs)	I_n	25kA	25kA	25kA
Max. discharge current (8/20μs)	I_{max}	60kA	60kA	60kA
Voltage protection level	U_p	$\leq 0.8kV$	$\leq 1.3kV$	$\leq 1.5kV$
Specific energy	W/R	39kJ/Ω	39kJ/Ω	39kJ/Ω
Short circuit withstand capacity	I_{SCCR}	25kA	25kA	25kA
Temporary overvoltage TOV-withstand	U_T	180V/5sec.	335V/5sec.	400V/5sec.
Temporary overvoltage TOV-safe failure	U_T	230V/120min.	440V/120min.	520V/120min.
Max. backup fuse		125A gG	125A gG	125A gG
Leakage current	I_{PE}	<1mA	<1mA	<1mA
Response time	t_A	$\leq 25ns$	$\leq 25ns$	$\leq 25ns$
Operating temperature range	T_u	-40°C–80°C	-40°C–80°C	-40°C–80°C
Operating state/fault indication		green/red	green/red	green/red
Cross-section area (Min.)		4mm ²	4mm ²	4mm ²
Cross-section area (Max.)		35mm ²	35mm ²	35mm ²
For mounting on		35mm Din rail		
Enclosure material		Thermoplastic UL94-V0		
Degree of protection		IP20	IP20	IP20
Order Code		B18211	B18213	B18215
Order Code (With remote signaling)		B18212	B18214	B18216